

**RAY-RAN**

# POLYTEST

*New Advanced Auto Density Measurement*

Optional Thermal  
Printer Output

Sample Height  
Determined By Encoder

Density Automatically  
Calculated

Wide range of materials  
can be tested by using  
3 columns

Microprocessor Controlled  
System


Pumped Filling System  
as Standard

Density Range  
0.8000 g/cm<sup>3</sup>  
to 2.000 g/cm<sup>3</sup>

Automatic Sweep System

Optional Computerised  
Filling System

Power  
220 v @ 50hz  
115 v @ 60hz

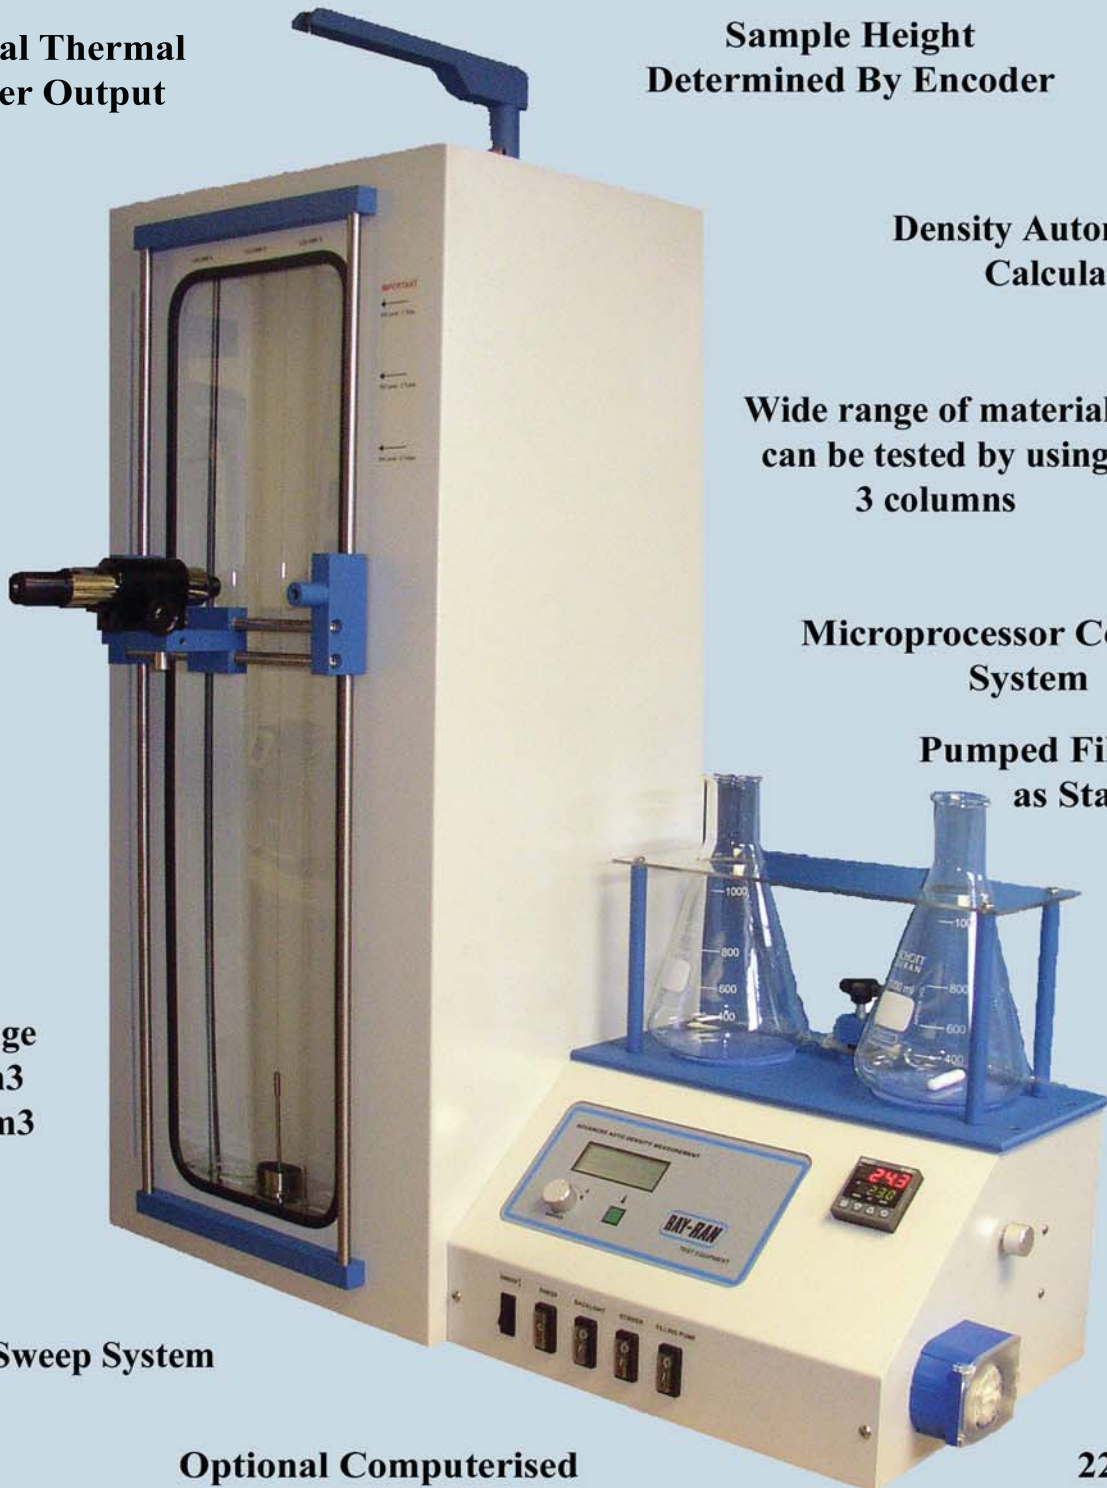

Certificate No. 4915

## World Wide Testing for Quality

Kelsey Close Attleborough Fields Industrial Estate  
Nuneaton Warwickshire CV11 6RS United Kingdom  
Telephone : +44 (0)24 7634 2002 Fax : +44 (0)24 7664 1670

[www.ray-ran.com](http://www.ray-ran.com) email : [polytest@ray-ran.com](mailto:polytest@ray-ran.com)